


		INCH	MM
CROWN WHEEL BOLT PCD	D1	6.625	168.3
No. OF BOLTS		10	10
THREAD / THRO' HOLE		0.453	11.5
CROWN WHEEL SPIGOT DIA	D2	5.563	141.3
BEARING DIA	D3	1.9667	50.0
	D3/A	1.7238	43.8
BEARING DISTANCE	L1	3.762	95.5
SPIGOT LENGTH	L2	0.700	17.8
	L2/A	0.700	17.8
OVERALL LENGTH	L3	5.162	131.1
BEARING/CROWN WHEEL	L4	0.111	2.8
BORE	D4	1.377	35.0
DRIVE SHAFT SPLINE:-			
No. OF TEETH		31	
PITCH		24/48 DP	
TYPE			
PRESSURE ANGLE		45 DEG	

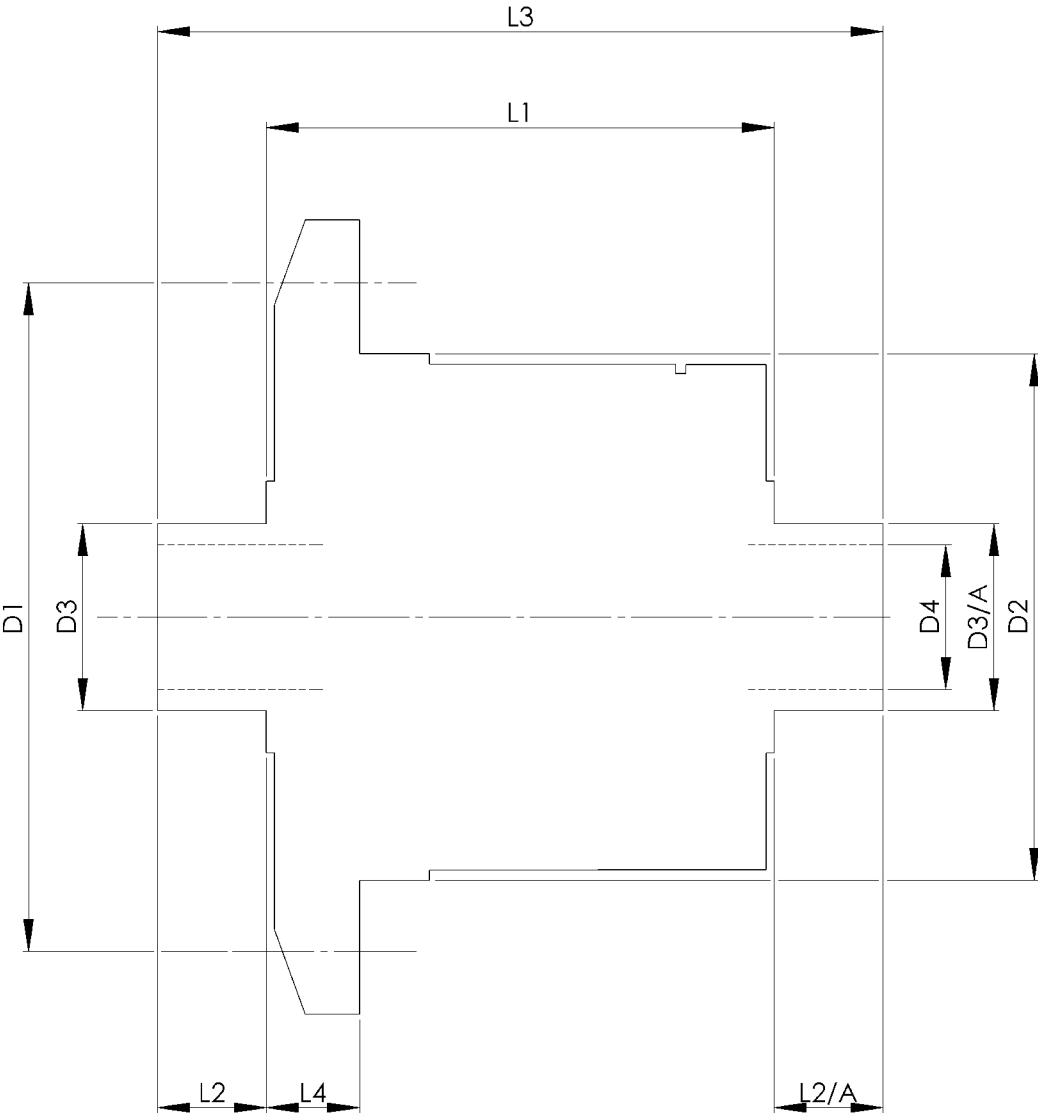

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDH2E

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OF DESIGN IS STRICTLY
CONFIDENTIAL & THE PROPERTY OF
THE ENGINEERING PROPERTY OF
ALFA 164 / MRD
AND MAY NOT BE USED, COPIED OR REPRODUCED
WITHOUT THE WRITTEN PERMISSION.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. $\pm 1/64"$	
DEC. $\pm 0.005"$	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 16.5.05	
DRAWN BY. M.L.M.	
Used In.	ALFA 164 / MRD